



外形寸法图

RC4000-16

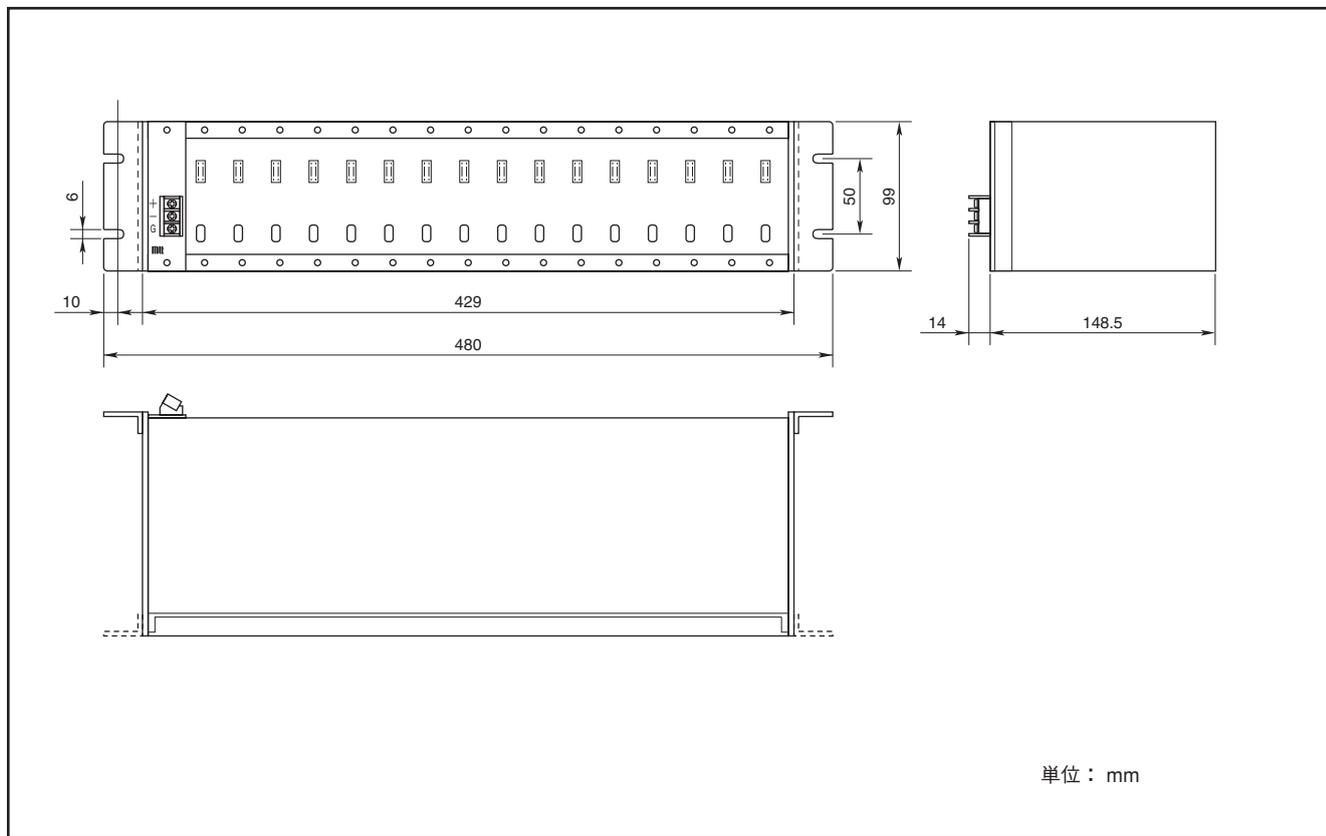

单位：mm

RC4000-12

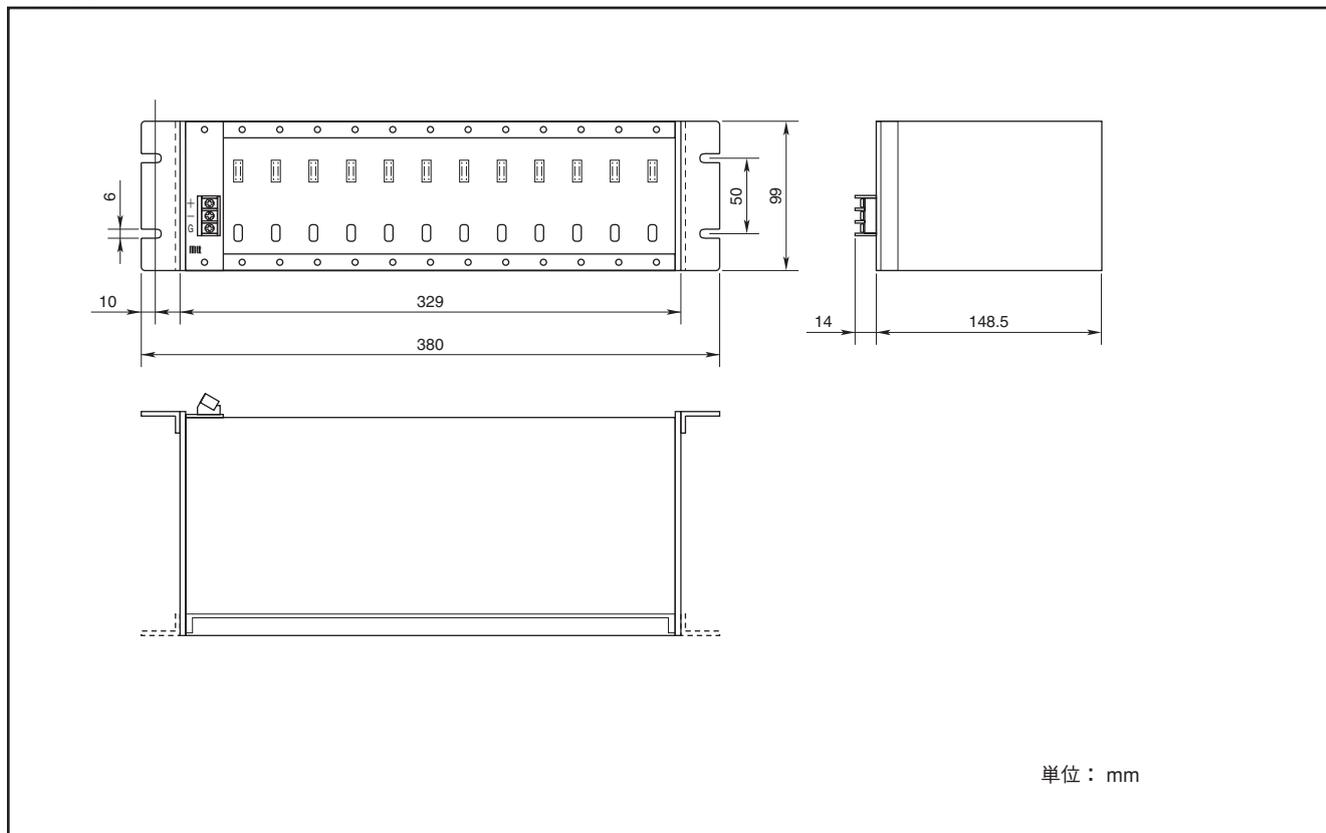

单位：mm

受注生産品

MS4000

MS4000-2W

MS4100


MS2300

MS3200

OTHER


外形寸法図

RC4000-08

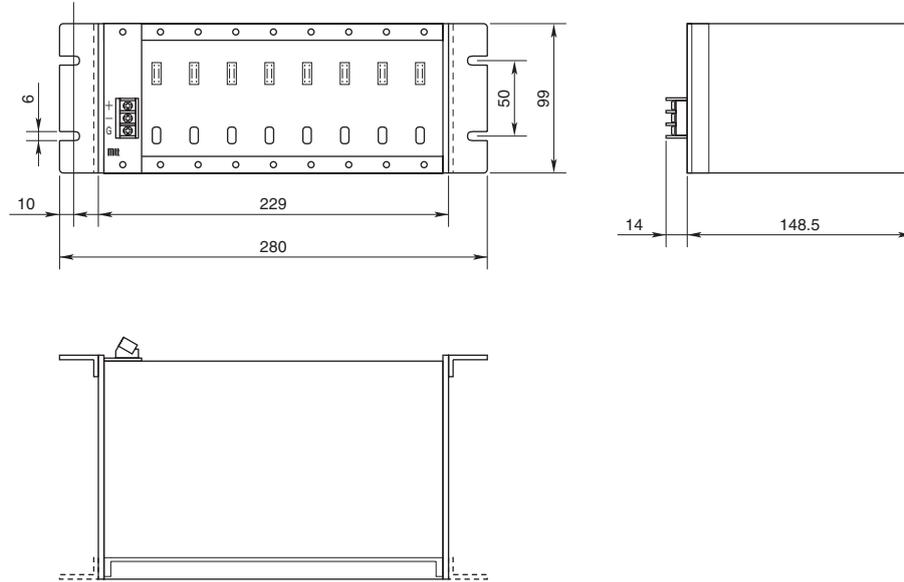

単位：mm


RC4000-04

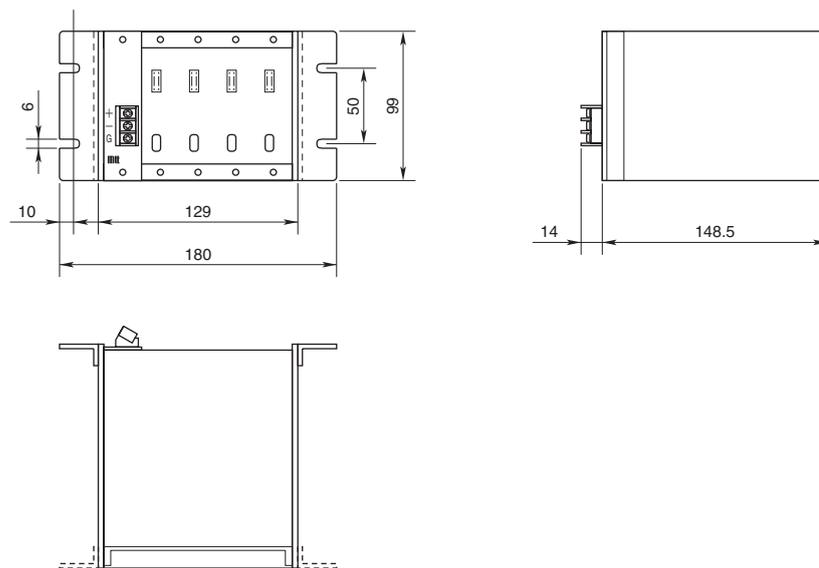

単位：mm

外形寸法図


PF4000



PF4000-C3
OUTPUT 2 CN. PIN ASSIGNMENT

Pin No.	Signal Name	Pin No.
40	+ CH-1	39
38	+ CH-9	37
36	+ CH-2	35
34	+ CH-10	33
32	+ CH-3	31
30	+ CH-11	29
28	+ CH-4	27
26	+ CH-12	25
24	+ CH-5	23
22	+ CH-13	21
20	+ CH-6	19
18	+ CH-14	17
16	+ CH-7	15
14	+ CH-15	13
12	+ CH-8	11
10	+ CH-16	9
2,4,6,8,	N.C.	1,3,5,7,

使用コネクタ型式：HIF3E-40PA-2.54DS (ヒロセ電機)




PF4000-C5
OUTPUT 2 CN. PIN ASSIGNMENT

Pin No.	Signal Name	Pin No.
34	+ CH-1	33
32	+ CH-2	31
30	+ CH-3	29
28	+ CH-4	27
26	+ CH-5	25
24	+ CH-6	23
22	+ CH-7	21
20	+ CH-8	19
18	+ CH-9	17
16	+ CH-10	15
14	+ CH-11	13
12	+ CH-12	11
10	+ CH-13	9
8	+ CH-14	7
6	+ CH-15	5
4	+ CH-16	3
2	N.C.	1

使用コネクタ型式：HIF3F-34PA-2.54DS (ヒロセ電機)

適合コネクタ型式：HIF3BA-34D-2.54R-CL (21) (ヒロセ電機)



PF4000-C6
OUTPUT 1,2 CN. PIN ASSIGNMENT

Pin No.	Signal Name	Pin No.
2	+ CH-1	21
3	+ CH-2	22
4	+ CH-3	23
5	+ CH-4	24
6	+ CH-5	25
7	+ CH-6	26
8	+ CH-7	27
9	+ CH-8	28
10	+ CH-9	29
11	+ CH-10	30
12	+ CH-11	31
13	+ CH-12	32
14	+ CH-13	33
1,15~19,	N.C.	20,34~37,





使用コネクタ型式：FDCC-37S (ヒロセ電機)

適合コネクタ型式：HDCB-37P (ヒロセ電機)

*但しAC100V電源使用時のみに対応

単位：mm

RC4000-02DC/RC4000-02AC

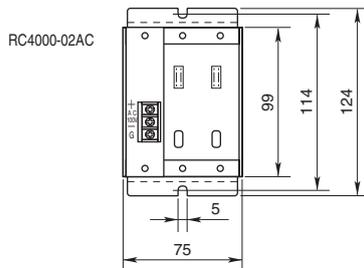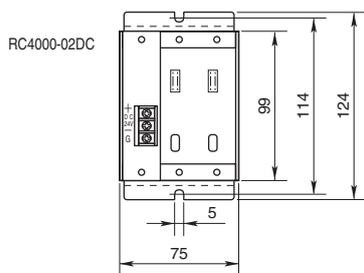

単位：mm

受注生産品

MS4000

MS4000-2W

MS4100


MS2300

MS3200

OTHER

外形寸法図

RC4000-MB

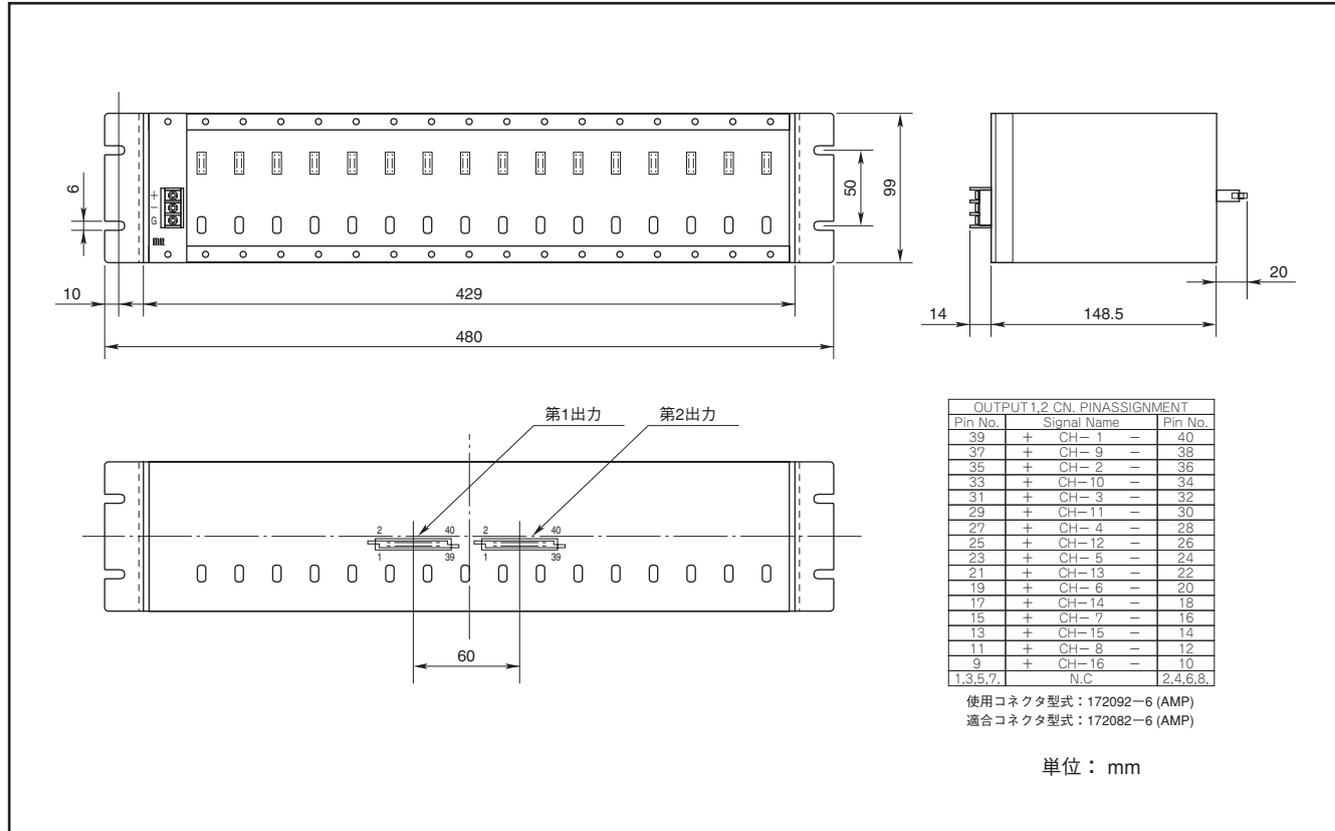

RC4000-YH

