


**DESCRIPTION**

The MS3761 is a slim, plug-in adder that receives two DC current or voltage signals and outputs a signal proportional to the sum of those signals. The unit provides isolated single or dual output.

**ORDERING CODE**

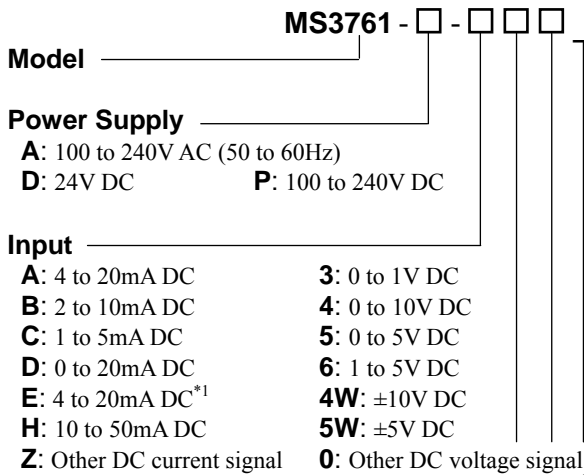

**A:** 100 to 240V AC (50 to 60Hz)  
**D:** 24V DC                      **P:** 100 to 240V DC

<b>A:</b> 4 to 20mA DC	<b>3:</b> 0 to 1V DC
<b>B:</b> 2 to 10mA DC	<b>4:</b> 0 to 10V DC
<b>C:</b> 1 to 5mA DC	<b>5:</b> 0 to 5V DC
<b>D:</b> 0 to 20mA DC	<b>6:</b> 1 to 5V DC
<b>E:</b> 4 to 20mA DC*1	<b>4W:</b> ±10V DC
<b>H:</b> 10 to 50mA DC	<b>5W:</b> ±5V DC
<b>Z:</b> Other DC current signal	<b>0:</b> Other DC voltage signal


\* 1: Shunt resistor 50Ω

<b>A:</b> 4 to 20mA DC	<b>1:</b> 0 to 10mV DC
<b>D:</b> 0 to 20mA DC	<b>2:</b> 0 to 100mV DC
<b>Z:</b> Other DC current signal	<b>3:</b> 0 to 1V DC
	<b>4:</b> 0 to 10V DC
	<b>5:</b> 0 to 5V DC
	<b>6:</b> 1 to 5V DC
	<b>3W:</b> ±1V DC
	<b>4W:</b> ±10V DC
	<b>5W:</b> ±5V DC
	<b>0:</b> Other DC voltage signal

**Output 2** \_\_\_\_\_  
**No code:** None  
**The codes are the same as for Output 1.**

Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.  
Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550Ω maximum for Output 1 and 350Ω maximum for Output 2.

**Options** \_\_\_\_\_  
**No code:** None  
**/K:** Fast response (0 to 90% response time: 10ms max.)  
**/L:** Dual current output with high output load (OUT-1: 750Ω / OUT-2: 550Ω)  
**/X:** Others (Special order)  
\* For non-standard options, ask MTT for availability.



**ORDERING INFORMATION**

To place an order, please use the ordering code format as shown on the left. Also specify Input-1 and Input-2 factors (K1, K2).

(e.g.) MS3761-A-6A6 (K1 = 1.0 / K2 = 1.0)

\* Note that the Input-1 and Input-2 factors (K1, K2) should be specified between 0.1 and 2.0 (0.4 ≤ K1 + K2).

Other Ordering Examples:

For an input code of "Z": MS3761-A-ZAA (K1 = 1.0 / K2 = 1.0 / Input: 8 to 20mA)

For an output code of "0": MS3761-A-A60 (K1 = 1.0 / K2 = 1.0 / Output: 2 to 5V)

For an option code of "X": MS3761-A-66/X (K1 = 1.0 / K2 = 1.0 / Response frequency: 50Hz)

Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /KX).

**SPECIFICATIONS**

**POWER SECTION**

<b>Power Requirements</b>	100 to 240V AC: 85 to 264V AC (47 to 63Hz)		
	24V DC: 24V DC±10%		
	100 to 240V DC: 85 to 264V DC		
<b>Power Sensitivity</b>	Better than ±0.1% of span for each power supply range.		
<b>Power Line Fuse</b>	160mA fuse is installed (standard).		
<b>Power Consumption</b>			
Power	100-240V AC	24V DC	100-240V DC
Single Output	4.5VA max	1.4W max	4.8W max
Dual Output	5.5VA max	1.7W max	6.0W max

**INPUT SECTION**

<b>Input Resistance</b>		
Voltage Input (DC)	With or without power: 1MΩ min.	
Current Input (DC)		
4 to 20mA (std.)	250Ω	
2 to 10mA	250Ω	
1 to 5 mA	100Ω	
0 to 20mA	250Ω	
10 to 50mA	10Ω	
<b>Allowable Input Voltage</b>		
Voltage Input Model	30V DC max., continuous. (for a span up to 10V)	
Current Input Model	40mA DC max., continuous. (for 4 to 20mA)	

Ranges Available		
	Current Signal	Voltage Signal
Input Range (DC)	-100 to 100mA	-10 to 10V
Input Span (DC)	100µA <sup>(*)</sup> to 200mA	200mV <sup>(*)</sup> to 20V
Input Bias	-100 to 100%	-100 to 100%

Note: For any input range including negative input signals, the input spans for current and voltage signals range from <sup>(\*)</sup>200µA to 200mA and <sup>(\*)</sup>400mV to 20V, respectively.

Input Spec. Ex. 1: For 3 to 8V input, the input span is 5V and the bias +60%.

Input Spec. Ex. 2: For -5 to 0V input, the input span is 5V and the bias -100%.

● **OUTPUT SECTION**

Allowable Output Load		
Voltage Output (DC)	1V span and up	2mA max.
	10mV	10kΩ min.
Current Output (DC)	100mV	100kΩ min.
	4-20mA single output	750Ω max.
Zero Adjustment	4-20mA dual output	Output 1: 550Ω max. Output 2: 350Ω max.
	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)	
Span Adjustment	Approx. ±5% span. (Adjustable by the front-accessible trimmer.)	
Output Range Equation	0 to approx. 120%	

Output (%) = IN1 (%) × K1 + IN2 (%) × K2  
 where  
 IN1: Input 1 (%), K1: Input-1 factor  
 IN2: Input 2 (%), K2: Input-2 factor  
 \* IN1 & IN2: 0 to 120%

(Example)  
 Input: 1 to 5V / Output: 0 to 10V, K1: 0.7, K2: 0.3  
 When the Input 1 is 3V (50%) and the Input 2 is 2V (25%), the output is:  
 $50\% \times 0.7 + 25\% \times 0.3 = 42.5\% (4.25V)$

Ranges Available		
	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%

\* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.

Output Spec. Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.

Output Spec. Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.

● **PERFORMANCE**

Accuracy Rating	Better than ±0.1% of span (at 25°C±5°C).
Temperature Effect	Better than ±0.2% of span per 10°C change in ambient.
Response Time	85ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	4-way isolation between input, output [Output 1/Output 2], power, and ground.

Insulation Resistance	100MΩ min. (@ 500V DC) between input, output [Output 1/Output 2], power, and ground.
Dielectric Strength	Input / Output [Output 1/Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.
Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C

● **PHYSICAL**


Installation	Wall/DIN rail mounting
Wiring	M3.5 screw terminal connection (with a power terminal block cover & drop-out prevention screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W29 × H86 × D125mm (including the mounting screw and socket)
Weight	Main unit: 120g max. Socket: 80g max.

● **MATERIALS**

Housing	ABS resin (UL 94V-0)
Terminal Block	PBT resin (UL 94V-0)
Terminal Block Cover	PC resin (UL 94V-2)
DIN Rail Stopper	PP resin (UL 94HB)
Screw Terminal	Nickel-plated steel
Contacts Material and Finish	Brass with 0.2µm gold plating
Printed Circuit Board	Glass fabric epoxy resin (FR-4: UL 94V-0)
Anti-Humidity Coating	HumiSeal® 1A27NS (Polyurethane)

\* HumiSeal® is a registered trademark of Chase Corporation.

**TERMINAL ASSIGNMENT**

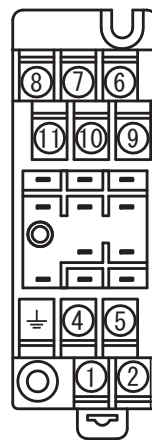

①	P (+)	POWER
②	N (-)	
⊥	GND	
④	+ OUTPUT 1	
⑤	- OUTPUT 1	
⑥	- INPUT 2	
⑦	+ OUTPUT 2	
⑧	- OUTPUT 2	
⑨	+ INPUT 1	
⑩	- INPUT 1	
⑪	+ INPUT 2	

**BLOCK DIAGRAM**

