


DESCRIPTION

The MS3762 is a slim, plug-in subtractor that receives two DC current or voltage signals and outputs a signal proportional to the difference between those signals. The unit provides isolated single or dual output.

ORDERING CODE

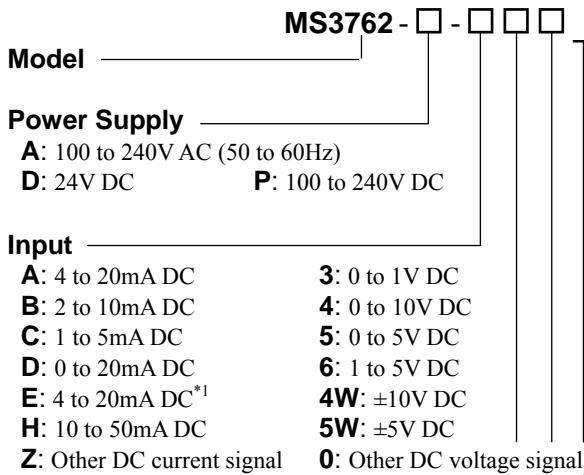

A: 100 to 240V AC (50 to 60Hz)
D: 24V DC **P:** 100 to 240V DC

A: 4 to 20mA DC **3:** 0 to 1V DC
B: 2 to 10mA DC **4:** 0 to 10V DC
C: 1 to 5mA DC **5:** 0 to 5V DC
D: 0 to 20mA DC **6:** 1 to 5V DC
E: 4 to 20mA DC*¹ **4W:** ±10V DC
H: 10 to 50mA DC **5W:** ±5V DC
Z: Other DC current signal **0:** Other DC voltage signal

* 1: Shunt resistor 50Ω


A: 4 to 20mA DC **1:** 0 to 10mV DC
D: 0 to 20mA DC **2:** 0 to 100mV DC
Z: Other DC current signal **3:** 0 to 1V DC
 4: 0 to 10V DC
 5: 0 to 5V DC
 6: 1 to 5V DC
 3W: ±1V DC
 4W: ±10V DC
 5W: ±5V DC
 0: Other DC voltage signal

No code: None
The codes are the same as for Output 1.

Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.
Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550Ω maximum for Output 1 and 350Ω maximum for Output 2.

Options _____

No code: None
/K: Fast response (0 to 90% response time: 10ms max.)
/L: Dual current output with high output load (OUT-1: 750Ω / OUT-2: 550Ω)
/X: Others (Special order)
* For non-standard options, ask MTT for availability.



ORDERING INFORMATION

To place an order, please use the ordering code format as shown on the left. Also specify Input-1 and Input-2 factors (K1, K2).

(e.g.) MS3762-A-6A6 (K1 = 1.0 / K2 = 1.0)

* Note that the Input-1 factor (K1) should be specified between 0.4 and 2.0, and the Input-2 factor (K2) between 0.1 and 2.0.

Other Ordering Examples:
For an input code of "0": MS3762-A-0AA (K1 = 1.0 / K2 = 1.0 / Input: 0.2 to 1V)
For an output code of "0": MS3762-A-A60 (K1 = 1.0 / K2 = 1.0 / Output: 2 to 5V)
For an option code of "X": MS3762-A-66/X (K1 = 1.0 / K2 = 1.0 / Response frequency: 50Hz)
Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /KX).

SPECIFICATIONS

POWER SECTION

Power Requirements	100 to 240V AC: 85 to 264V AC (47 to 63Hz)		
	24V DC: 24V DC±10%		
	100 to 240V DC: 85 to 264V DC		
Power Sensitivity	Better than ±0.1% of span for each power supply range.		
Power Line Fuse	160mA fuse is installed (standard).		
Power Consumption			
Power	100-240V AC	24V DC	100-240V DC
Single Output	4.5VA max	1.4W max	4.8W max
Dual Output	5.5VA max	1.7W max	6.0W max

INPUT SECTION

Input Resistance		
Voltage Input (DC)	With or without power: 1MΩ min.	
Current Input (DC)	4 to 20mA (std.)	250Ω
	2 to 10mA	250Ω
	1 to 5mA	100Ω
	0 to 20mA	250Ω
	10 to 50mA	10Ω
Allowable Input Voltage		
Voltage Input Model	30V DC max., continuous. (for a span up to 10V)	
Current Input Model	40mA DC max., continuous. (for 4 to 20mA)	

Ranges Available		
	Current Signal	Voltage Signal
Input Range (DC)	-100 to 100mA	-300 to 300V
Input Span (DC)	100 μ A ^(*) to 200mA	200mV ^(*) to 600V
Input Bias	-100 to 100%	-100 to 100%

Note: For any input range including negative input signals, the input spans for current and voltage signals range from ^(*)200 μ A to 200mA and ^(*)400mV to 600V, respectively.

Input Spec. Ex. 1: For 3 to 8V input, the input span is 5V and the bias +60%.

Input Spec. Ex. 2: For -5 to 0V input, the input span is 5V and the bias -100%.

● OUTPUT SECTION

Allowable Output Load		
Voltage Output (DC)	1V span and up	2mA max.
	10mV	10k Ω min.
Current Output (DC)	100mV	100k Ω min.
	4-20mA single output	750 Ω max.
	4-20mA dual output	Output 1: 550 Ω max. Output 2: 350 Ω max.

Zero Adjustment	Approx. \pm 5% of span. (Adjustable by the front-accessible trimmer.)	
Span Adjustment	Approx. \pm 5% span. (Adjustable by the front-accessible trimmer.)	
Output Range Equation	0 to approx. 120%	

Output (%) = IN1 (%) \times K1 - IN2 (%) \times K2
 where
 IN1: Input 1 (%), K1: Input-1 factor
 IN2: Input 2 (%), K2: Input-2 factor
 * IN1 & IN2: 0 to 120%

(Example)
 Input: 1 to 5V / Output: 0 to 10V, K1: 0.7, K2: 0.3
 When the Input 1 is 3V (50%) and the Input 2 is 2V (25%), the output is:
 $50\% \times 0.7 - 25\% \times 0.3 = 27.5\%$ (2.75V)

Ranges Available		
	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%

* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.

Output Spec. Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.

Output Spec. Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.

● PERFORMANCE

Accuracy Rating	Better than \pm 0.1% of span (at 25 $^{\circ}$ C \pm 5 $^{\circ}$ C).
Temperature Effect	Better than \pm 0.2% of span per 10 $^{\circ}$ C change in ambient.
Response Time	85ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	4-way isolation between input, output [Output 1/Output 2], power, and ground.

Insulation Resistance	100M Ω min. (@ 500V DC) between input, output [Output 1/Output 2], power, and ground.
Dielectric Strength	Input / Output [Output 1/Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.
Operating Environment	Ambient temperature: -5 to 55 $^{\circ}$ C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60 $^{\circ}$ C

● PHYSICAL


Installation	Wall/DIN rail mounting
Wiring	M3.5 screw terminal connection (with a power terminal block cover & drop-out prevention screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W29 \times H86 \times D125mm (including the mounting screw and socket)
Weight	Main unit: 120g max. Socket: 80g max.

● MATERIALS

Housing	ABS resin (UL 94V-0)
Terminal Block	PBT resin (UL 94V-0)
Terminal Block Cover	PC resin (UL 94V-2)
DIN Rail Stopper	PP resin (UL 94HB)
Screw Terminal	Nickel-plated steel
Contacts Material and Finish	Brass with 0.2 μ m gold plating
Printed Circuit Board	Glass fabric epoxy resin (FR-4: UL 94V-0)
Anti-Humidity Coating	HumiSeal [®] 1A27NS (Polyurethane)

* HumiSeal[®] is a registered trademark of Chase Corporation.

TERMINAL ASSIGNMENT

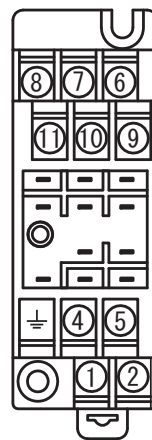

①	P (+)	POWER
②	N (-)	
③	GND	
④	+ OUTPUT 1	
⑤	- OUTPUT 1	
⑥	- INPUT 2	
⑦	+ OUTPUT 2	
⑧	- OUTPUT 2	
⑨	+ INPUT 1	
⑩	- INPUT 1	
⑪	+ INPUT 2	

BLOCK DIAGRAM

