

DESCRIPTION

The MS3769 is a slim, plug-in absolute value signal conditioner that converts DC current or voltage signals with polarity into absolute value signals and provides isolated single or dual output.


ORDERING CODE**MS3769** - □ - □ □ □**Model****Power Supply****A:** 100 to 240V AC (50 to 60Hz)**D:** 24V DC**P:** 100 to 240V DC**Input****D:** ABS 0 to 20mA DC**Z:** Other DC current signal**3:** ABS 0 to 1V DC**4:** ABS 0 to 10V DC**5:** ABS 0 to 5V DC**0:** Other DC voltage signal**Output 1****A:** 4 to 20mA DC**D:** 0 to 20mA DC**Z:** Other DC current signal**1:** 0 to 10mV DC**2:** 0 to 100mV DC**3:** 0 to 1V DC**4:** 0 to 10V DC**5:** 0 to 5V DC**6:** 1 to 5V DC**0:** Other DC voltage signal**Output 2****No code:** None**The codes are the same as for Output 1.**

Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.

Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550Ω maximum for Output 1 and 350Ω maximum for Output 2.

Options**No code:** None**/K:** Fast Response (0 to 90% response time: 10ms max.)**/X:** Others (Special order)

* For non-standard options, ask MTT for availability.

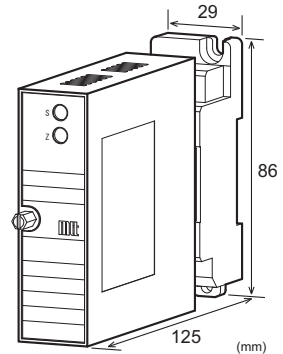**ORDERING INFORMATION**

To place an order, please use the ordering code format as shown on the left.
(e.g.) MS3769-A-AA6

Other Ordering Examples:

For an input code of "Z": MS3769-A-ZAA (Input: 8 to 20mA)

For an output code of "0": MS3769-A-A60 (Output: 2 to 5V)

For an option code of "X": MS3769-A-66/X (0-90% response time: 5ms max.)

Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /KX).

SPECIFICATIONS**POWER SECTION**

Power Requirements	100 to 240V AC: 85 to 264V AC (47 to 63Hz) 24V DC: 24V DC±10%
Power Sensitivity	Better than ±0.1% of span for each power supply range.
Power Line Fuse	160mA fuse is installed (standard).

Power Consumption

Power	100-240V AC	24V DC	100-240V DC
Single Output	4.0VA max	1.5W max	2.5W max
Dual Output	5.0VA max	2.0W max	3.0W max

INPUT SECTION**Input Resistance**

Voltage Input (DC) With or without power: 1MΩ min.

Current Input (DC) 0 to 20mA 250Ω

Allowable Input Voltage

Voltage Input Model 30V DC max., continuous. (Standard for a span up to 10V)

Current Input Model 40mA DC max., continuous. (0 to 20mA)

Ranges Available		
	Current Signal	Voltage Signal
Input Range (DC)	-100 to 100mA	-300 to 300V
Input Span (DC)	100µA ^(*) to 200mA	200mV ^(*) to 600V
Input Bias	-100 to 100%	-100 to 100%

Note: For any input range including negative input signals, the input spans for current and voltage signals range from ^(*)200µA to 200mA and ^(*)400mV to 600V, respectively.

Input Spec. Ex. 1: For 3 to 8V input, the input span is 5V and the bias +60%.

Input Spec. Ex. 2: For -5 to 0V input, the input span is 5V and the bias -100%.

● OUTPUT SECTION		
Maximum Output Load		
Voltage Output (DC)	1V span and up	2mA max.
	10mV	10kΩ min.
	100mV	100kΩ min.
Current Output (DC)	4-20mA single output	750Ω max.
	4-20mA dual output	Output 1: 550Ω max.
		Output 2: 350Ω max.
Zero Adjustment	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)	
Span Adjustment	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)	

Ranges Available		
	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%

* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.

Output Spec. Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.

Output Spec. Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.

● PERFORMANCE	
Accuracy Rating	Better than ±0.1% of span (at 25°C±5°C).
Temperature Effect	Better than ±0.2% of span per 10°C change in ambient.
Response Time	85ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	4-way isolation between input, output [Output 1/Output 2], power, and ground.
Insulation Resistance	100MΩ min. (@ 500V DC) between input, output [Output 1/Output 2], power, and ground.
Dielectric Strength	Input / Output [Output 1/Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.


Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C

● PHYSICAL	
Installation	Wall/DIN rail mounting
Wiring	M3.5 screw terminal connection (with a power terminal block cover & drop-out prevention screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W29 × H86 × D125mm (including the mounting screw and socket)
Weight	Main unit: 120g max. Socket: 80g max.

● MATERIALS	
Housing	ABS resin (UL 94V-0)
Terminal Block	PBT resin (UL 94V-0)
Terminal Block Cover	PC resin (UL 94V-2)
DIN Rail Stopper	PP resin (UL 94HB)
Screw Terminal	Nickel-plated steel
Contacts Material and Finish	Brass with 0.2µm gold plating
Printed Circuit Board	Glass fabric epoxy resin (FR-4: UL 94V-0)
Anti-Humidity Coating	HumiSeal [®] 1A27NS (Polyurethane)


* HumiSeal[®] is a registered trademark of Chase Corporation.

TERMINAL ASSIGNMENT

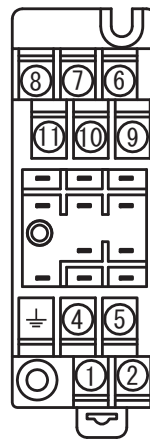

①	P (+)	POWER
②	N (-)	
⊥	GND	
④	+ OUTPUT 1	
⑤	- OUTPUT 1	
⑥	N.C.	
⑦	+ OUTPUT 2	
⑧	- OUTPUT 2	
⑨	+ INPUT	
⑩	- INPUT	
⑪	N.C.	

BLOCK DIAGRAM

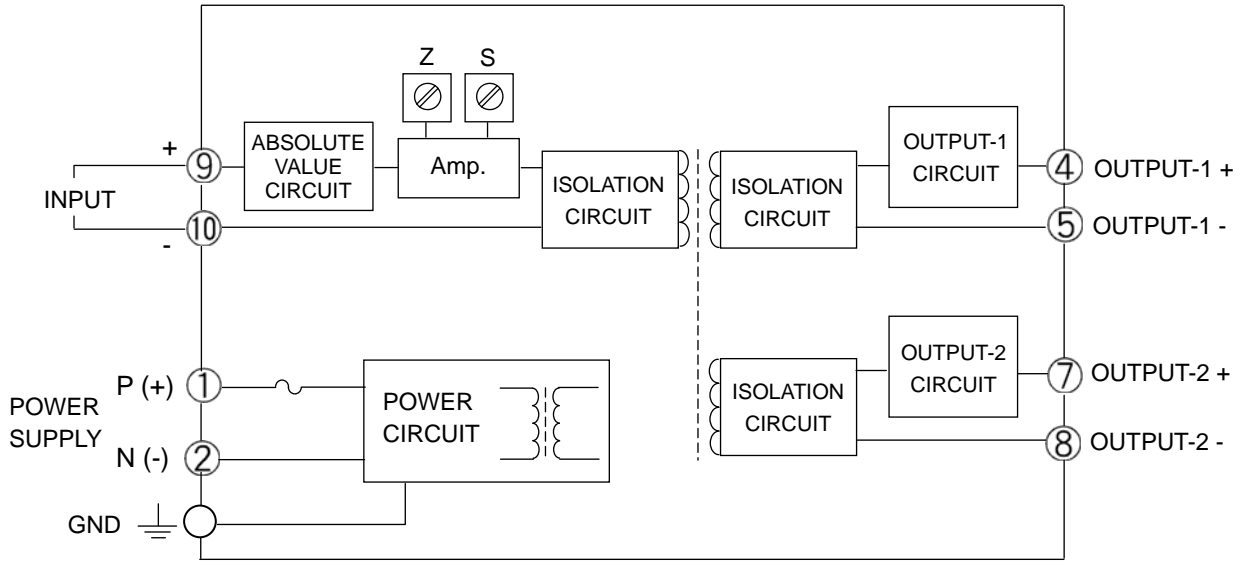

INPUT/OUTPUT CHARACTERISTICS

Input: ABS 0 to 10V
 Output: 0 to 10V

